



Color Sheetfed Digital Press

Brand: CANON

Code: ImagePRESS C850



Equipment used as a large printer capable of handling industrial printing volumes, while the material that can be used are various such as normal paper, drawing paper, cardboard, film or cloth. The imagePRESS C850 digital color production press offers end-users outstanding quality, productivity, and versatility in a compact, scalable footprint. Designed for small-to-medium commercial, franchise, in-plant, transactional and quick printers, the imagePRESS C850 is equipped to handle a variety of media options up to 110 lb. Cover and validated heavier stocks up to 130 lb. Cover, including heavy, coated, textured stock and envelopes at an outstanding level of reliability and performance. Built upon the successful imagePRESS C800 Series platform, the imagePRESS C850 offers users even more capabilities, ease of use, and productivity.

Features:

New Capabilities:

Fast turnaround with print speeds of up to 85 letter images per minute (Color and B&W)

Duplex long sheet printing of up to 30 inches for new applications*

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>



In-line finishing options:

Multi Function Professional Puncher for die punching and creasing

Booklet Trimmer with continuous run capability

Faster, Simple Registration Adjustment

PRISMAsync Color Print Server V5 for flexibility in achieving amazing print quality:

Realistic previews on the user interface

Flexible color corrections

Digital Moiré Reduction

Proven imagePRESS technologies:

Unique imagePRESS Gloss Optimization to help match the gloss level of the toner image to that of the paper used for offset-like quality

Advanced Twin Belt Fusing enables efficient belt heating and quick cooling for Gloss Optimization and fast print speeds

CV Toner for high-speed output of smooth, vivid, and consistent image quality

Compact Registration Module helps provide accurate registration in a small footprint, for first time right output

High definition 2400x2400 dpi print resolution with R-VCSEL Laser Scanner Unit

Advanced Image Transfer Belt for outstanding quality even on textured surfaces

Included:

Printing speed

A4 90 prints per minute;

A3 50 prints per minute;

SRA3 45 impressions per minute


MRA3 (I3X19) 40 prints per minute minimum

Device Paper Capacity: Up to 1,650 sheets, Maximum: Up to 7,650 sheets (75g Bond)

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

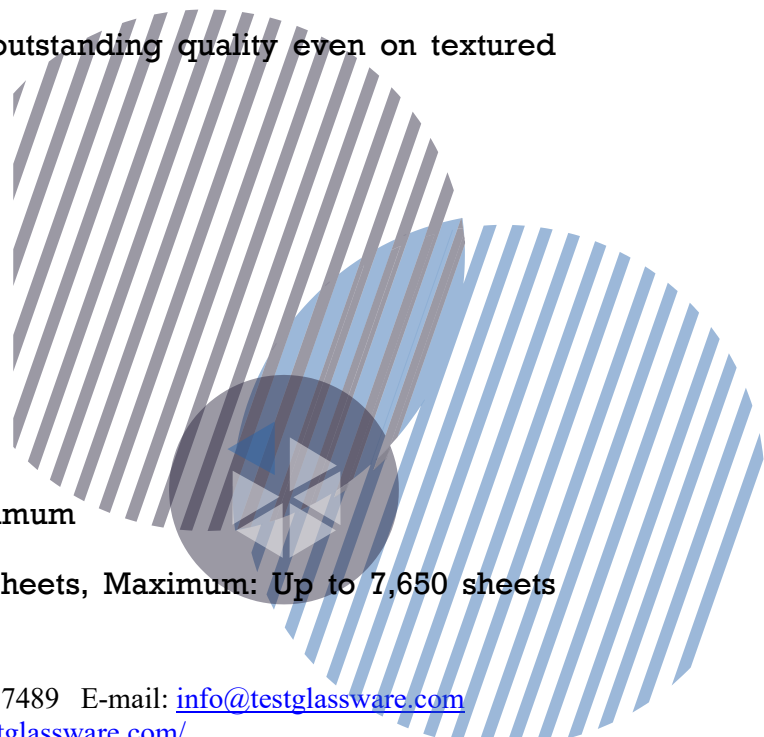



Paper Weight: 56g Bond to 350g Cover.

Automatic duplex.

Paper handling:

High Volume Feeder

Low 3,500 sheet capacity (70gsm Bond)

From 99.mm x 147.32mm (3.9" x 5.8") to 330mm x1200mm (13" x 50") Multi Bypass Tray-B1 Alignment tray for long sheets.

Finishing and Binding Module

Stapling with wire box of 7,000 Staples

Data processor capacity:

Intel processor with a frequency of 3.3 Ghz.

4 GB of RAM memory

OS compatibility: Windows, 7, 8.1 and 10. MacOS 10.9/10.11/10.12 and 10/13. USB connection type. Ethernet DVI Connector and Display Port Post.

Specifications

Print speed

imagePRESS C850: up to 85ppm

Recommended monthly volume

imagePRESS C850: 15,000 - 150,000 pages (A4)

Maximum monthly volume

imagePRESS C850: up to 500,000 pages (A4)

Log Tolerance

Face/Back: 1.0mm or less

Printing method

color laser printing

print resolution


2400 x 2400 dpi, 256 gradations

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone:786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018

Website: <https://testglassware.com/>

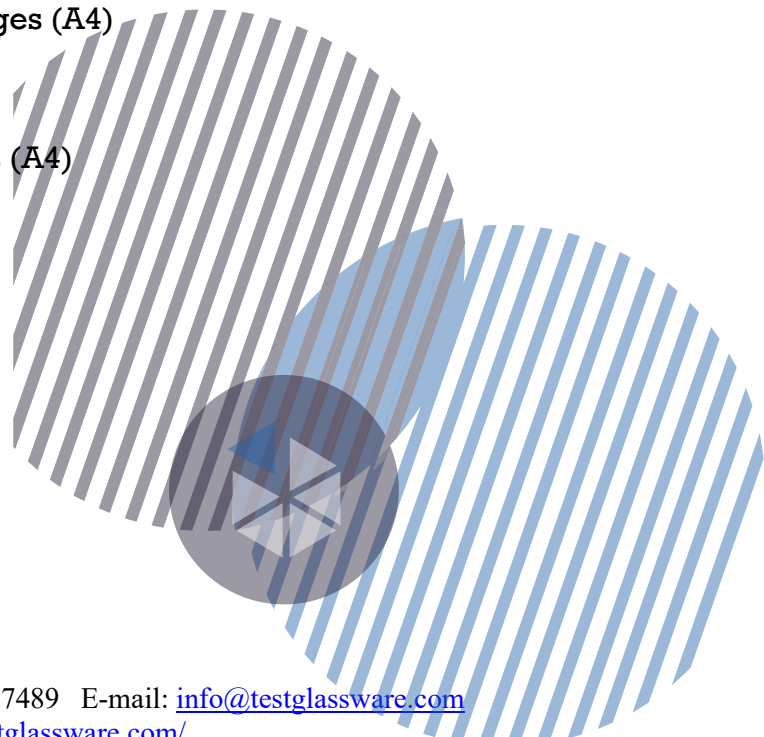



paper capacity

Standard: 3 x 550-sheet cassette (80 g/m²)

Option: 100-sheet multipurpose tray

POD Lite Deck C1: 1 x 3,500 Sheet Side Deck (A4/A3/SRA3)

POD Lite XL-A1 Deck: 1 x 3,500 sheet side paper feeder (A4/A3/SRA3), 1 x 1,000 sheets with a length > 487.7 mm

Multi-Cassette Paper Deck-C1: 1 x 6,000 sheets (3 x 2,000 sheets: A4/A3/SRA3)

Maximum paper input capacity

7,650 sheets (A4/A3)

Maximum paper output capacity

11,200 sheets (A4, 80 g/m²)

Supported Paper Types

Cassettes:

Thin paper, plain paper, recycled paper, colored paper, thick paper, paper

Prepunched, Bond, Letterhead*, Transparency, Envelopes**

Multipurpose tray:

Thin paper, plain paper, recycled paper, colored paper, thick paper, glossy paper,

pre-punched paper, tabs, bond, transparencies, labels, envelopes, letterhead

Optional paper feeders:

Thin paper, plain paper, recycled paper, colored paper, thick paper, paper

Pre-punched, Coated Paper, Textured Paper, Bond, Clear, Label,

letterhead, lined paper, envelopes

Supported paper sizes


Multi-purpose tray and paper cassette 1/2/3

Standard size: A4, A4R, A5R, A3, SRA3, 13x19"

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

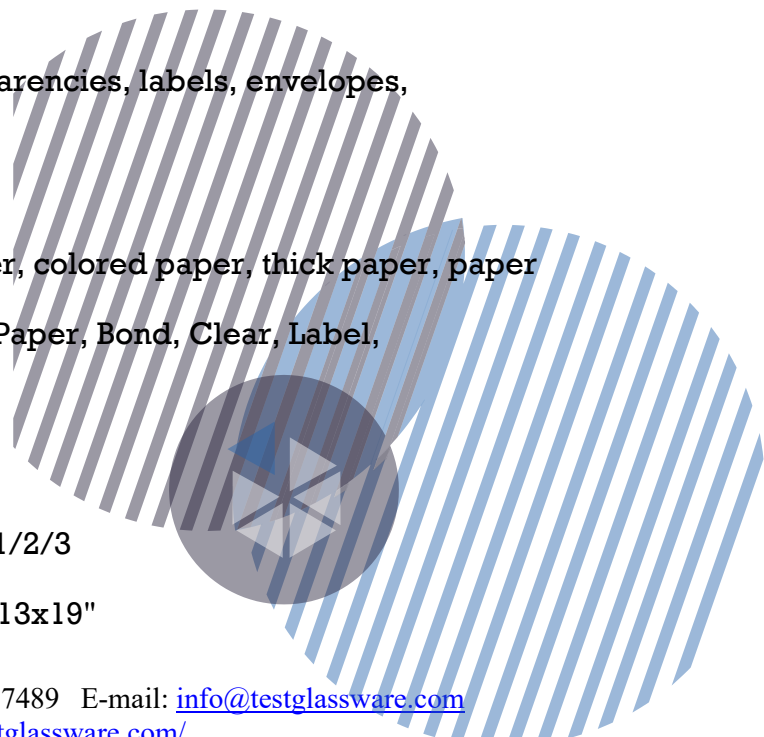



(330 x 483mm)

Free size: 100 x 148 mm to 330.2 x 487.7 mm

Envelopes: #10 (COM10), Monarch, ISO-C5, DL

POD Lite C1 Reservoir

Standard size: A4, A4R, A5R, A3, SRA3, 13x19"

(330 x 483mm)

Free size: 139.7 x 148 mm to 330.2 x 487.7 mm

Envelopes: #10 (COM10), Monarch, ISO-C5, DL

POD Lite XL-A1 Reservoir

Standard size: A4, A4R, A5R, A3, SRA3, 13x19"

(330 x 483mm)

Free size: 139.7 x 148 mm to 330.2 x 487.7 mm

Long sheet: 210 x 487.8 mm to 330.2 x 762 mm

Envelopes: #10 (COM10), Monarch, ISO-C5, DL

Multi-Cassette Paper Deck-C1

Standard size: A4, A4R, A5R, A3, SRA3, 13x19"

(330 x 483mm)

Free size: 139.7 x 182 mm to 330.2 x 487.7 mm

Envelopes: ISO-C5

Supported paper weights

Cassettes: 52 to 220 g/m²

Multi-purpose tray/optional paper feeders: 52 to 300 g/m²

Duplex: 52 to 300 g/m²

Heavier weight validated media compatible with POD Lite C1 Deposit and Deposit


POD Lite XL-A1*

heating time

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

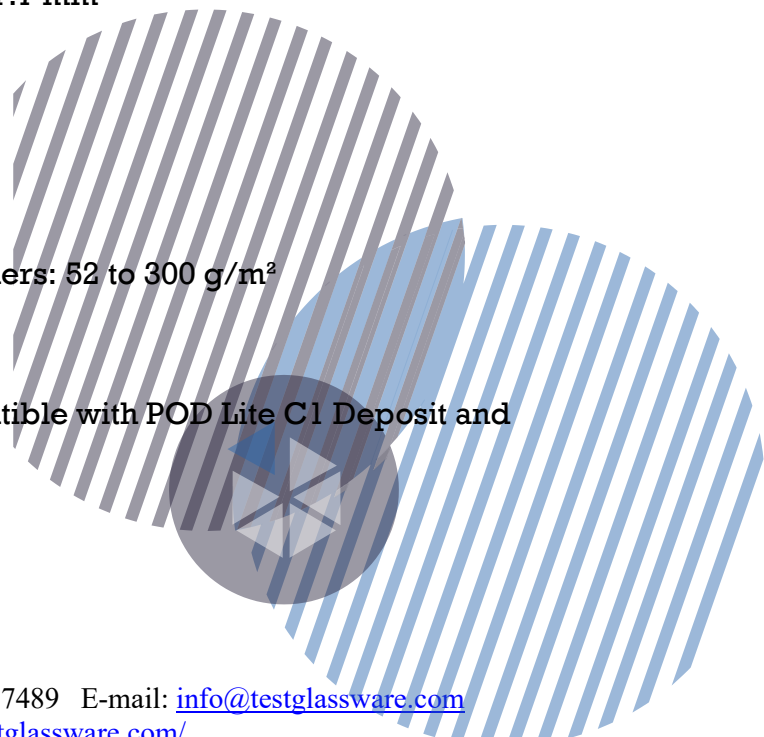



Approx. 360 seconds

interface type

Hi-Speed USB 2.0

Ethernet: 1000BaseT/100Base-TX/10Base-T

Standard: 1 USB hosts

*1 on the left side of the PRISMAsync operation panel

network protocols

TCP/IP* (LPD/Port 9100/WSD/IPP/IPPS/SMB/FTP), IPX/SPX (NDS, binder), AppleTalk

*IPv4/IPv6 support

processor speed

1.66GHz (SOC ARM 1136JF-S 400MHz, ARM 946 200MHz)

Memory

1.5GB (SOC 2GB)

Harddrive unit

Standard 1TB hard drive

Control Panel (EFI/Canon PS/PCL)

Reclining control panel G1: reclining SVGA color TFT touch screen with 26.4 cm (10.4 in) LED backlight

Control panel (PRISMAsync)

A5 control panel: 15-inch touch screen

Dimensions (W x D x H)

1952mm* x 934mm x 1424mm** (W x D x H)

* Includes optional output tray and control panel

** Includes control panel height to ADF of 1222.2 mm


Minimum Installation Dimensions (W x D)

1952 (W) x 1624 (D) mm

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

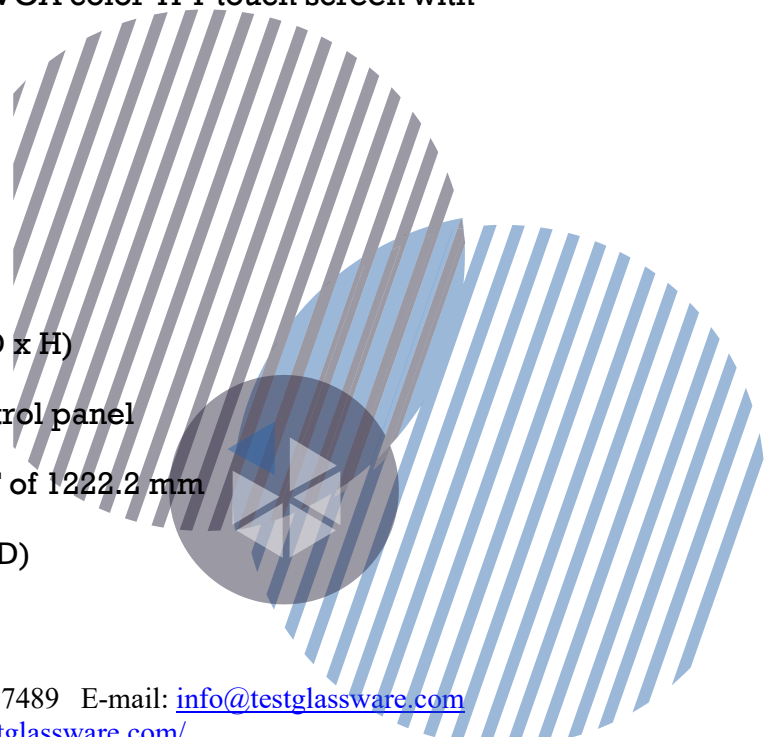



Weight

Approx. 316kg *Includes ADF

operating environment

20 to 27°C (50 to 86°F)

Humidity: 15 to 60% relative humidity (non-condensing)

Power supply

220-240 V ($\pm 10\%$), 50/60 Hz (± 2 Hz), 2 x 16A *All Europe

Energy consumption

Maximum: approx. 1560 W (at power supply) or less and 2500 W (at unit melting) or less

Plug In-Off Mode: Approx. 1.0Wh or less

Sleep mode: approx. 1.5Wh or less

Typical Electricity Consumption (TEC): 10.7 kWh on the imagePRESS C850 at 85 ppm; 9.9kWh

on the imagePRESS C750 at 75 ppm

Noise levels (BN/CL)

Sound pressure

Operating: 75 dB or less; standby: 58 dB or less

Fiery print controller specifications

Optional/Standard

Optional

Name

imagePRESS Server H300 (Fiery-based external server)

imagePRESS Server G200 (Fiery-based embedded server)

Page Description Languages

PCL5/6 (utility and driver compatibility: only for PCL interpreter/built-in is available on the external Fiery server)

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>





Adobe PostScript Level 4

Resolution

1200 dpi x 1200 dpi, 600 dpi x 600 dpi

Memory

Fiery-based external server: 2 x 2 GB

Fiery-based embedded server: 1 x 4 GB

Harddrive unit

Fiery-based external server: 2 x 1TB

Fiery-based embedded server: 1 x 500 GB

processor speed

Fiery-based external server: up to 3.6 GHz (Intel Core i5-2400)

Fiery-based embedded server: 3.3 GHz (Intel Pentium G850)

Sources

138 Adobe PS fonts, 113 PCL fonts, 32 barcodes

Supported operating systems

Windows: 7, 8/8.1, 10, Server 2008/2008R2, Server 2012/2012R2/2016

Mac OS: 10.9, 10.10, 10.11, 10.12

Interface

Ethernet 1000 Base-T/100Base-TX/10Base-T, USB, DVI connector (H300 only),
display port connector (H300 only)

network protocols

TCP/IP, AppleTalk (supported by Font Downloader only), Bonjour,
SNMP, IPP, FTP, SMB, IPv6, WSD (minimum support to achieve the
WHQL-certified)

EFI accessories (optional)

Impose and Compose, GA Package Premium Edition (for H300),

productivity (for G200), removable hard drive kit (for H300)

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>



PRISMAsync Controller Specifications

Optional/Standard

Optional

Name

PRISMAsync iPR C850 series

Page Description Languages

PostScript L3, PDF 1.7, IPDS (Transactional), PCL/PJL (Transactional)

Resolution

PS/PDF: 600 x 600 dpi or 1200 x 1200 dpi, Transactional PCL: 600 x 600 dpi, IPDS

transactional: 600 x 600 dpi

Memory

1 x 8GB DDR3

Harddrive unit

2 x 3.5" SATA II, 500GB, 7200rpm

processor speed

2.9GHz (Intel Quad Core i5-4570S)

Sources

136 Type1 fonts for the Romance languages

Importing user PS fonts via the settings editor

Optional Adobe Asian Fonts:

Japanese: 5 Morisawa fonts (no font is Heisei)

Chinese: 2 fonts for simplified Chinese, 1 font for traditional Chinese

Korean: 1 font for Korean

Supported operating systems

7 (32/64-bit), Server 2012R2, 8.1 (32/64-bit), and 10

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018

Website: <https://testglassware.com/>



MacOS 10.9 (64-bit), MacOS 10.10 (64-bit), MacOS 10.11 (64-bit), Server 2016, MacOS

10.12/13 (64bit)

Interface

Ethernet (10/100/1000 Base-T), USB for files via control panel, DVI

for control panel connection

network protocols

TCP/IP,

SNMP v1/v3, Host Resources MIB, System Group MIB II,

Printer MIB, Job Monitoring MIB, Job Management MIB

sending via lpr, hotfolders, socket, IPP,

JDF/JMF, USB stick

Scan Specifications

Name

Duplex Color Imager K1

Description

Optional color flatbed scanner unit and automatic document feeder

300-sheet duplex (single-pass duplex scanning)

Type

Color flatbed scanner and duplex automatic document feeder in one

He passed

Supported paper sizes

A3, A4, A4R, A5, A5R, free sizes (W x L): min. 139.7mm x 128mm, max. 432 mm x 304.8mm

Supported weights (BN/CL)

1-sided scanning (black and white/colour): 38 to 220 g/m² / 64 to 220 g/m²

Duplex scanning (black and white/color): 50 to 220 g/m² / 64 to 220 g/m²

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>



scan resolution

Copy: 600 dpi x 600 dpi

Send: 600 dpi x 600 dpi / 300 dpi x 300 dpi

duplex scanning

Double-sided to double-sided (automatic)

scan speed

Simplex (A4, 300 dpi): (BW/LC) 120/120 ipm*

Duplex (A4, 300 dpi): (B/W) 200/140 ipm*

Simplex (A4, 600 dpi): (B/L) 120/70 ipm*

Duplex (A4, 600 dpi): (BW/CL) 120/70 ipm*

*When the PRISMAsync RIP is connected as below.

Simplex and duplex (A4, 600 dpi): (B/W) 70/70 ipm

Shipping Specifications

Optional/Standard

Standard on all models (requires Duplex Imager H1)

Shipping Resolution

100 dpi, 150 dpi, 200 x 100 dpi, 200 dpi, 300 dpi, 200 x 400 dpi, 400 x 200 dpi,
400dpi, 600dpi

Destination

Email/Internet FAX (SMTP), PC (SMB, FTP), WebDAV. Google Docs with
MEAP Cloud Connect app for iR-ADV

Address Book/Fast Dials

LDAP (1000) / Local (max. 500)

file formats

TIFF, JPEG, PDF, XPS, High Compression PDF/XPS, PDF/A-1b, searchable


PDF/XPS, Office Open XML (PowerPoint, Word)

Advanced shipping features

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

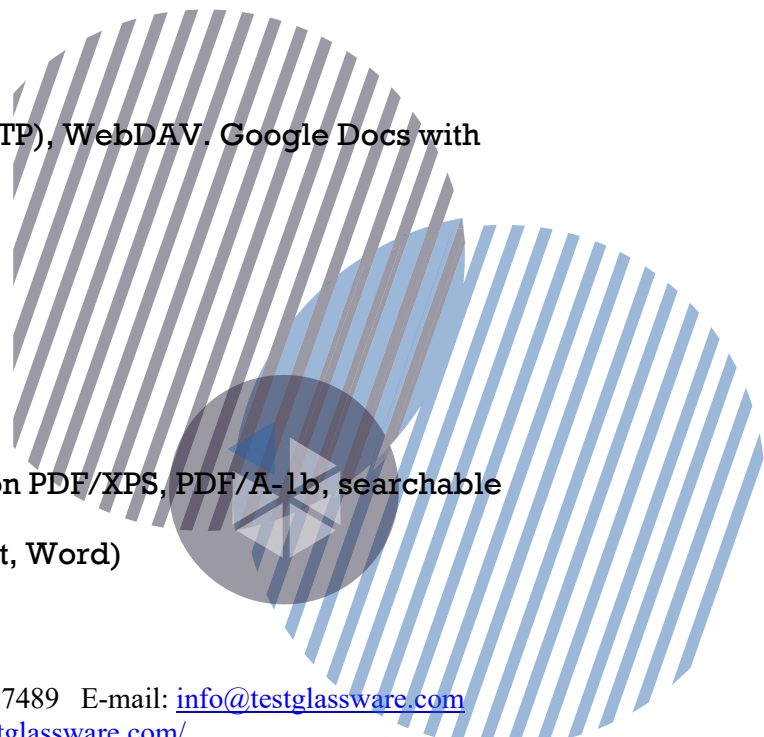



Universal H1 Shipping Advanced Feature Set (Optional): Create PDF of outline (Trace & Smooth), PDF with Adobe Reader extensions (search on PDF/XPS as standard).

Universal Shipping Security Feature Suite D1 (Optional) - Send PDF encrypted and add the device's digital signature to PDF/XPS files.

Universal set of user digital signature for sending C1 (optional): add the signature

user digital to PDF/XPS files.

Copy Specifications

Copy speed (BW/CL)

85 ppm model: up to 85/85 ppm (A4/A5R), up to 62 ppm (A4R)

75 ppm model: up to 75/75 ppm (A4/A5R), up to 54 ppm (A4R)

First Copy Out Time (B&W/Colour)

Colour: approx. 7.7 seconds

BN: approx. 6.9 seconds

Copy Resolution

Reading: 600 dpi x 600 dpi

Printing: 2400 dpi x 2400 dpi

multiple copies

Up to 9999 copies

Enlargement/ Reduction range

Zoom: 25% - 400% in 1% increments

Fixed zoom ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%

input specifications

POD Lite C1 Reservoir


POD Lite C1 Reservoir

Paper size: A3, A4, A4R, A5R, SRA3, 13x19", free size

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

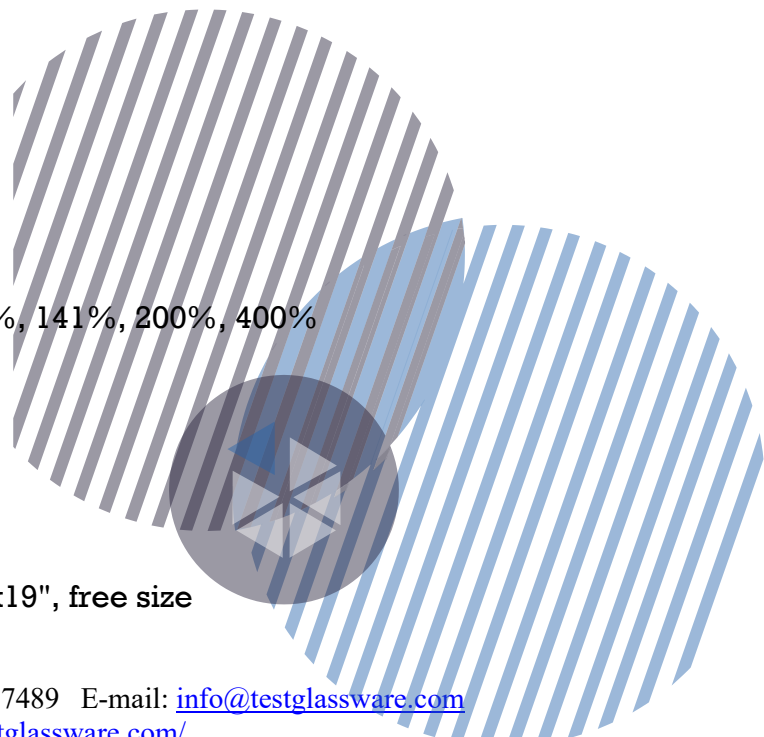



(139.7 x 148mm to 330.2 x 487.7mm),

envelopes: #10 (COM10), Monarch, ISO-C5, DL

Paper weight: 52 to 300 g/m²

Supports validated with higher grammage *

Paper capacity: 3,500 sheets (80 g/m²) /

4,000 sheets (64gsm)

Dimensions (W x D x H): 717mm x 686mm x 574mm

Weight: approx. 76kg

POD Deck Lite XL-A1 Reservoir

Paper size: A3, A4, A4R, A5R, SRA3, 13x19", free size

(139.7 x 148 mm to 330.2 x 487.7 mm / 210 x 487.8 mm to

330.2 x 762 mm), envelopes: #10 (COM10), Monarch

ISO-C5,DL

Paper weight:

(Length up to 487.7 mm) 52 to 300 g/m²

(Length over 487.7 mm and up to 762 mm) 64 to 300 g/m²

Supports validated with higher grammage *

Paper capacity:

(Length up to 487.7 mm) 3,500 sheets (80 g/m²) / 4,000

sheets (64gsm),

(Length over 487.7 mm and up to 762 mm), 1,000 sheets (80 g/m²)

Dimensions (W x D x H): 1,105mm x 686mm x 574mm

Weight: approx. 113kg

Multi-bin paper deck-C1

Paper size: A3, A4, A4R, A5R, SRA3, 13x19", free size


(139.7 x 182 mm to 330.2 x 487.7 mm), envelopes (ISO-C5)

Paper weight: 52 to 300 g/m²

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

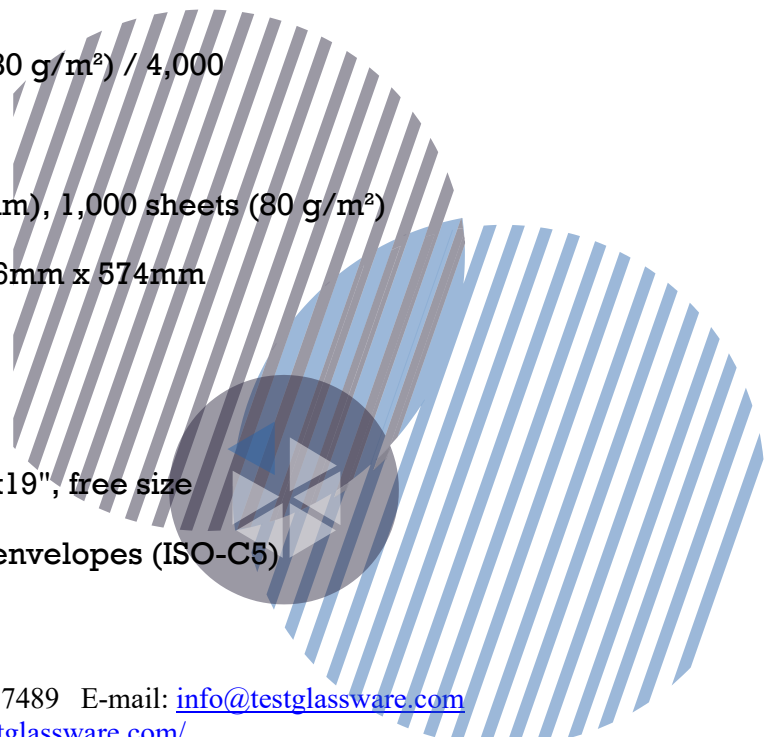



Paper capacity: 3 x 2,000 sheets, 6,000 sheets total (80

g/m²) / 3 x 2,200 sheets, 6,600 sheets total (64 g/m²)

Dimensions (W x D x H): 950mm x 797mm x 1040mm

Weight: approx. 155kg

Multi-purpose tray-B1

Paper size: A3, A4, A4R, A5R, SRA3, 13x19", free size

(100 x 148mm to 330.2 x 487.7mm)

Paper weight: 52 to 300 g/m²

Paper capacity: 100 sheets (80 g/m²)

Dimensions (W x D x H): 403mm (694mm*) x 518mm x

352mm (451mm*)

*With Stack Bypass Alignment Tray-C2 and Long Sheet Tray-B1

Weight: approx. Approx. 5.5kg (approx. 6.7kg*)

*With Stack Bypass Alignment Tray-C2 and Long Sheet Tray-B1

Long sheet tray-B1

Paper size: 210 x 487.7 mm to 330.2 x 762 mm

Paper weight: 52 to 300 g/m²

Paper capacity: 1 sheet

output specifications

W1 Pro Staple Finisher

Tray capacity:

Upper tray capacity (A):

A4/A4R/A5R/A3, SRA 3/13x19", 1,000 sheets

Long blade (greater than 487.7 mm and up to 762 mm in length): 100

sheets (52-79 g/m²) / 50 sheets (80-150 g/m²) / 25 sheets


(151-300gsm)

Lower tray capacity (B): 4,000 sheets A4, 2,000 sheets A4R

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

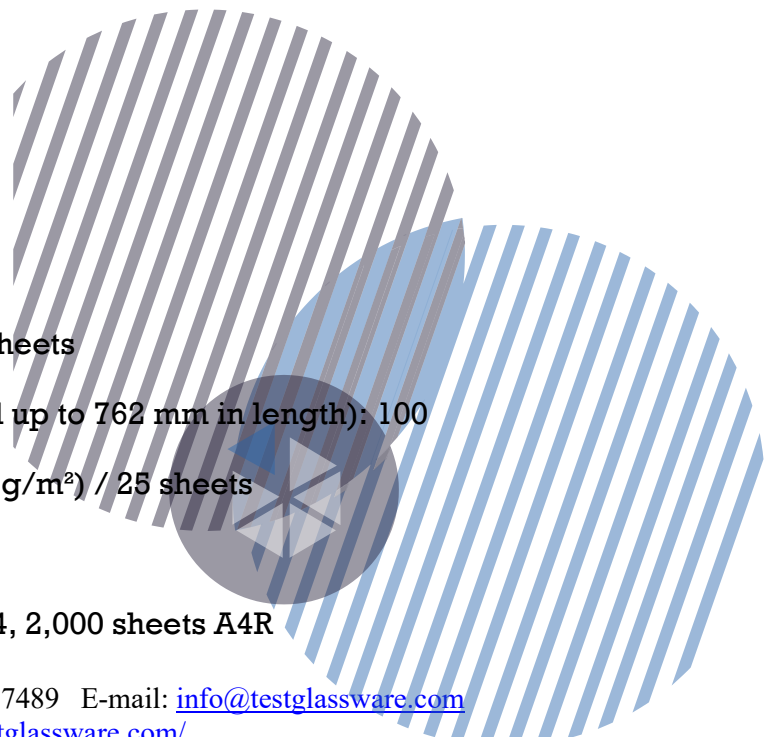



, 1,500 sheets A3, 1,000 sheets SRA3

Paper weight: 52 to 300 g/m²

Staple Position: Corner, Double

Stapling capacity: A4: 100 sheets, A3/A4R: 50 sheets

Dimensions (W x D x H): 800mm x 792mm x 1239

mm (with long sheet tray: 1,136 mm x 792 mm x 1,239 mm)

Weight: approx. 130kg

Power supply: 220-240V, 50-60Hz, 8A

W1 Pro Booklet Finisher

Tray Capacity / Paper Weight / Staple Position / Staple

Ability:

Same as Staple Finisher W1 Pro

Booklet binding paper size: A3, A4R, SRA3, 13x19", size

free (210 x 279.4 mm to 330.2 x 487.7 mm)

Booklet binding paper weight: 52-220 g/m² sheet,

Cover sheet: 64 to 300 g/m²

Saddle stitch stapling capacity: 25 sheets (52-80 g/m², including cover)

Dimensions (W x D x H): 800mm x 792mm x 1239

mm (with long sheet tray: 1,136 mm x 792 mm x 1,239 mm)

Weight: approx. 180kg

Power supply: 220-240V, 50-60Hz, 8A

BT1 / BU1 drilling unit

Requires a Booklet Finisher W1 Pro or a

Staple Finisher W1 Pro

Drilled hole type: BT1: 2 holes and 4 holes (FRN)


selectable, BU1: 4 holes (SWE)

Punched paper weight: 52 to 300 g/m²

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

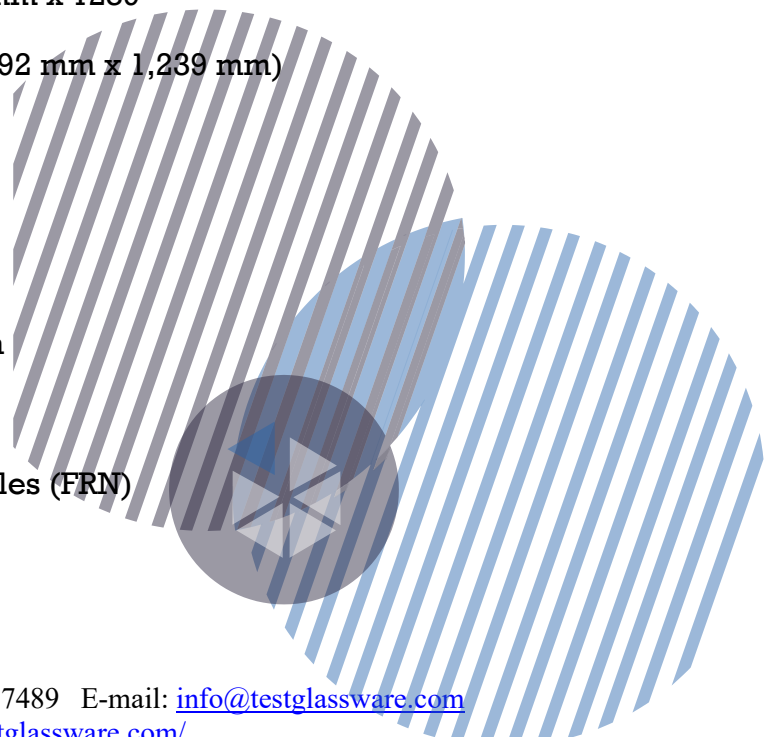



Punched paper size:

2 holes: A3, A4, A4R, free size (from 182 x 182 mm to 297 x 432.0mm)

4 holes: A3, A4, free size (257 x 182 mm to 297 x 432 mm)

Copy tray R2

Paper Size: All sizes available in the marking engine

Paper weight: 52 to 300 g/m²

Output capacity: 250 sheets simplex/duplex
printing

Dimensions (W x D x H): 422mm x 382mm
175mm

Weight: approx. 1.2kg

BT1 / BU1 drilling unit

Requires W1 Pro Booklet Finisher or W1 Pro Staple Finisher

Punched hole type: BT1: 2 holes and 4 holes (FRN) selectable, BU1: 4
holes (SWE)

Punched paper weight: 52 to 300 g/m²

Punched paper size:

2 holes: A3, A4, A4R, free size (182 x 182 mm to 297 x 432.0 mm)

4 holes: A3, A4, free size (257 x 182 mm to 297 x 432 mm)

H1 High Capacity Stacker

Paper size: A3, A4, A4R, A5R, SRA3, 13x19",

Free size (140 x 182 mm to 330.2 x 487.7 mm)

Paper weight: 52 to 300 g/m²

output capacity


Document Stacker: 6,000 sheets (80 g/m²) in two stacks of 3,000

sheets each

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

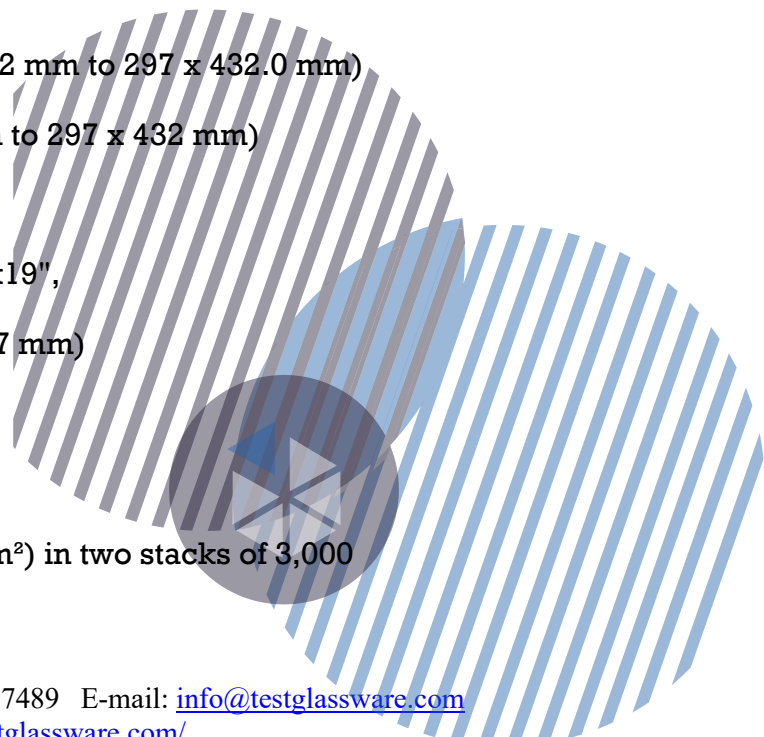



Top tray: 200 sheets (80 g/m² / up to 330.2 x 762 mm)

Dimensions (W x D x H):

899mm × 745mm × 1040mm

Weight: approx. 120kg

Power: 90-264V, 47-63Hz, 10A

H1 High Capacity Stacker

Paper size: A3, A4, A4R, A5R, SRA3, 13x19",

Free size (140 x 182 mm to 330.2 x 487.7 mm)

Paper weight: 52 to 300 g/m²

output capacity

Document Stacker: 6,000 sheets (80 g/m²) in two stacks of 3,000 sheets each

Top tray: 200 sheets (80 g/m² / up to 330.2 x 762 mm)

Dimensions (W x D x H):

899mm × 745mm × 1040mm

Weight: approx. 120kg

Power: 90-264V, 47-63Hz, 10A

Perfect Binder E1 Binding Machine

Booklet size: 203 x 138 mm to 297 x 216 mm

Booklet thickness: up to 25 mm

Cutting Range - Top/Bottom: 6.5 to 39.5mm each
edge, outer side: 6.5 to 49.5 mm

Body of the book:

Sizes: A4, SRA4, free size (257 x 182 mm to
320 x 228.6mm)


Paper weight and number of sheets:

Thin paper (52-63 g/m²): 30-200 sheets

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018 Website: <https://testglassware.com/>

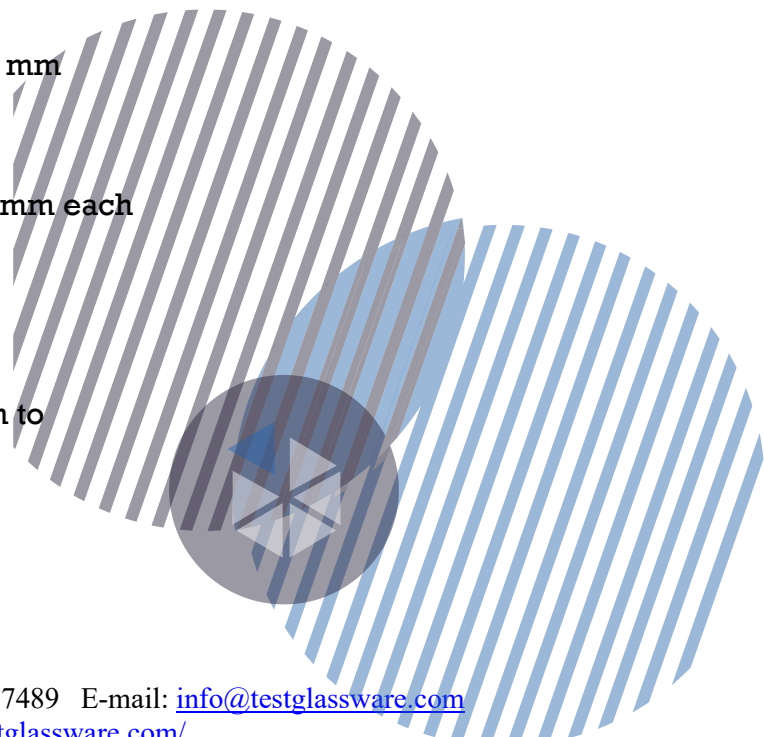



Plain paper (64-80 g/m²): 10-200 sheets

Plain paper (81-90 g/m²): 10-150 sheets

Thick paper (91-105 g/m²): 10-150 sheets

Thick paper (106-163 g/m²): up to 10 sheets as sheets
of insertion or up to 25 mm as thickness of the set

Cover page:

Number of sheets: 1 sheet

Sizes: A3, SRA3, free size (257 x 364 mm to 330.2 x
487.7mm)

Paper weight: 90 to 300 g/m²

Tray capacity: approx. 127mm or about 1000
total sheets of paper

Dimensions: 922mm x 791mm x 1300mm

Weight approx. 308kg

Power: 220-240V, 50-60Hz, 3.0A

Document Insertion Unit N1

Number of trays: 2 trays

Paper size: A3, A4, A4R, SRA3, 13x19"

Free Size (182 x 182 mm to 330.2 x 487.7 mm)

Paper weight: 52 to 300 g/m²

Paper capacity: 200 sheets x 2 trays (80 g/m²)

Dimensions (W x D x H): 336 mm (746 mm with tray)
× 793mm × 1407mm

Weight: approx. 61kg

Power: 100-240V, 50-60Hz, 1.0A

J1 folder


Zigzag fold: paper size: A3, A4R; paper weight: 52 to 105

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018

Website: <https://testglassware.com/>

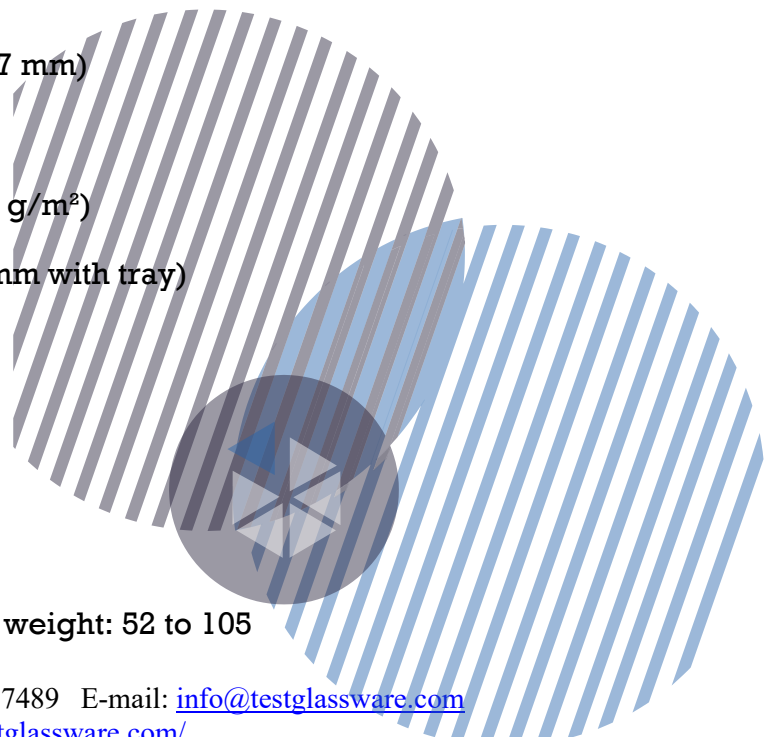



g/m²; Output Capacity: Same as Stapler/Booklet Finisher-W1

Pro

C-Fold: Paper Size: A4R; paper weight: 52 to 105 g/m²

output capacity: 40 sheets (81.4 g/m²)

Zigzag Accordion Fold: Paper Size: A4R; paper weight: 52 to 105gsm; output capacity: 40 sheets (81.4 g/m²)

Double Parallel: Paper Size: A4R; paper weight: 52 to 90 g/m²; output capacity: 25 sheets (81.4 g/m²)

Half Fold: Paper Size: A4R; paper weight: 52 to 105 g/m²;

Output Capacity: Same as Stapler/Booklet Finisher-W1

Dimensions (W x D x H) 336mm x 793mm x 1190mm

Weight: approx. 71kg

Booklet Cutter F1

Requires Booklet Finisher W1 Pro

Cutting width: from 2 to 28 mm

Cutting thickness: up to 50 sheets (with cover)

Paper weight: 52 to 300 g/m²

Chip Tray Capacity: Approx. 5,000 sheets (trim width 20mm, A4, 80gsm)

Dimensions (W x D x H): 2095 mm (with conveyor belt and output tray) x 790 mm x 1040 mm

Weight: approx. 178kg

(with conveyor belt and output tray)

Two-knife booklet cutting unit A1

Requires F1 Booklet Trimmer

Cutting width: from 2 to 15 mm


Cutting thickness: up to 50 sheets (with cover)

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018

Website: <https://testglassware.com/>

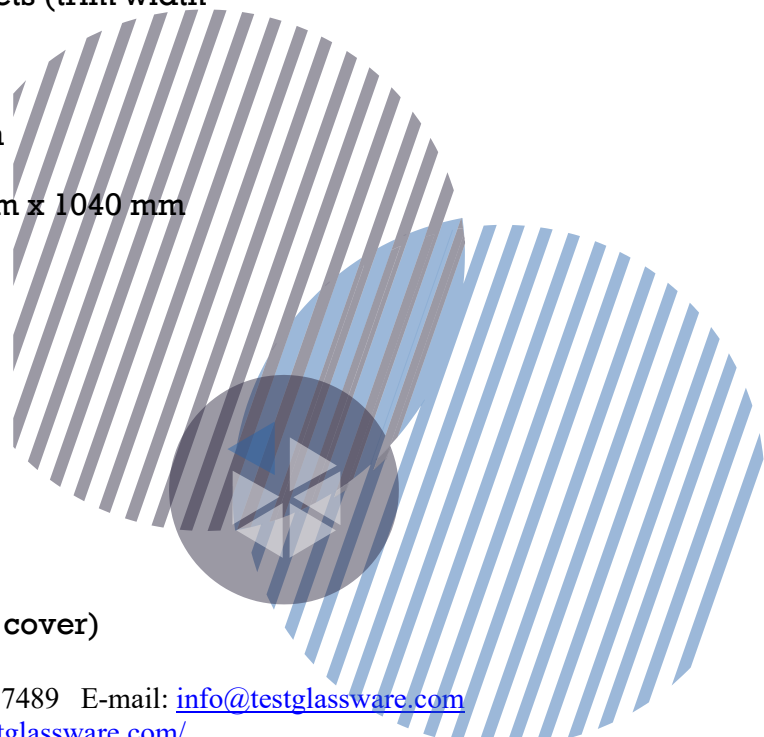



Paper weight: 52 to 300 g/m² (trim 60 to 300 g/m²)

Chip Tray Capacity: Approx. 1,500 sheets (trim width
15mm, A4, 80gsm)

Dimensions (W x D x H): 2312mm (with Booklet Trimmer F1) x 790mm x
1040mm

Weight: approx. 145kg

Power: 220-240V, 60Hz, 2.3A

Pro Multi-Function Punch A1

Paper weight:

(perforated/punched paper) 75-300 g/m²; (plain paper) 118-300

g/m²; (coated paper)

(folded) 157-300 g/m²; (plain paper/coated paper)

paper size:

(punched) from 100 x 148 mm to 330.2 x 762 mm

(perforated) SRA3, A3, SRA4, SRA4R, A4, A4R

(folded) SRA3, A3, A4R, 13x19", 13x19.2"

Drilling tools:

with plastic (21 holes), double round (23 holes) (round/
rectangular), double loop (34 holes) (round/square), spiral

Color (47 holes), Vellum (12 holes), Loose Leaf (4 holes),

Loose Leaf (2 Hole), Loose Leaf (4 Hole) (Swedish),

single sheet (3 holes), folded

Dimensions (W x D x H): 445mm x 795mm x 1040mm

Weight: approx. 102kg

Power supply: 230V, 50Hz, 1.9A

Staple Finisher T1


(only compatible with C750)

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018

Website: <https://testglassware.com/>

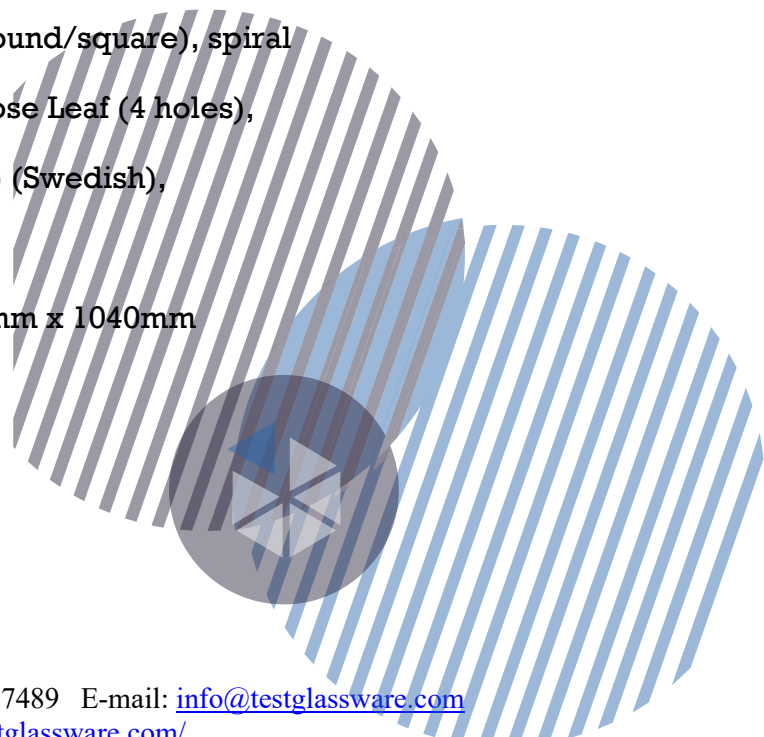



Tray capacity:

Upper tray capacity (A): 1,300 sheets A4/A5R, 650 sheets

A4R/A3/SRA3/13x19", 100 long sheets (over 487.7

mm and up to 762 mm in length) (52-79 g/m²) / 50

sheets (80-150 g/m²) / 25 sheets (151-300 g/m²)

Lower tray capacity (B): 2,450 sheets A4, 1,700 sheets A5R

, 650 sheets A4R/A3, 650 sheets SRA3/13x19"

Paper weight: 52 to 300 g/m²

Staple Position: Corner, Double

Stapling capacity: A4: 50 sheets, A3/A4R: 30 sheets

Dimensions (W x D x H): 644 mm (max. 761*) x 656 mm

x 1,121 mm (with long sheet tray: 939 mm x 656 mm

x 1121mm)

*When the auxiliary tray is extended.

Weight: approx. 48kg

Booklet Finisher-T1

(only compatible with C750)

Tray Capacity / Paper Weight / Staple Position / Staple

Capacity: Same as Staple Finisher-T1

Booklet paper size: A3, A4R

Booklet binding paper weight: 60-220 g/m² sheet,

Cover sheet: 60 to 256 g/m²

Saddle stitch stapling capacity: 16 sheets (60-81 g/m², including cover)

Dimensions (W x D x H): 646 mm (max. 761*) x 656 mm

x 1,121 mm (with long sheet tray: 939 mm x 656 mm

x 1121mm)


*When the auxiliary tray is extended.

EIN 37-1939950

11300 NW 87 CT STE 150 Telephone: 786 816 7489 E-mail: info@testglassware.com

HIALEAH, FL 33018

Website: <https://testglassware.com/>

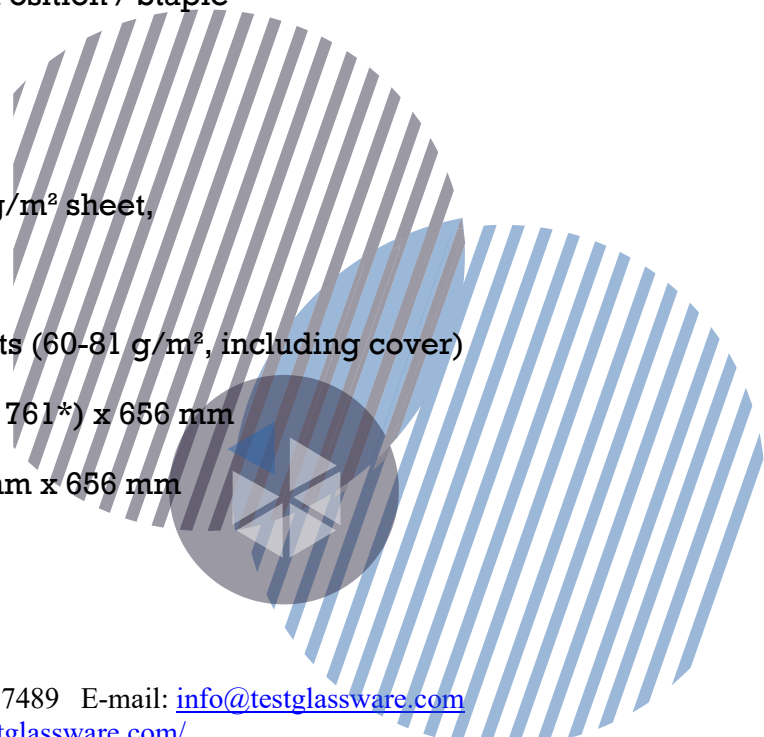



Weight: approx. 72kg

External 2/4 Hole Punch C1

Requires the Staple Finisher or Booklet Finisher-T1.

Drilled hole type: 2 holes and 4 holes (FRN)
selectable

Paper weight: 52 to 256 g/m²

Paper Size: 2 Holes: A3, A4; 4 holes: A3, A4

Dimensions (W x D x H): 107mm x 615mm x 825mm

Weight: approx. 7.7kg

External 4-Hole Punch C1

Requires the Staple Finisher or Booklet Finisher-T1.

Hole type: 4 holes (SWE)

Paper weight: 52 to 256 g/m²

Paper size: A3, A4, A4R

Dimensions (W x D x H): 107mm x 615mm x 825mm

Weight: approx. 7.7kg

